

LOS ANGELES DISTRICT - SANTA BARBARA AND VENTURA REGIONS DREDGING PROGRAM

Susie Ming, PE
Coastal Section Chief
Programs and Project Management
Los Angeles District


Date: 9 May 2024



U.S. ARMY



US Army Corps
of Engineers®

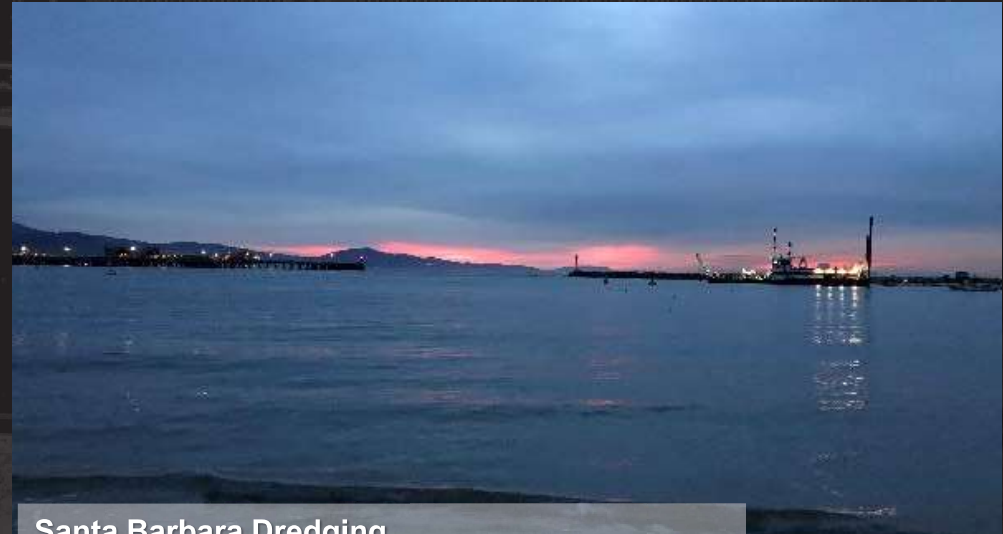

Santa Barbara Dredging



Port Hueneme Deepening



U.S. ARMY

OVERVIEW OF LOS ANGELES DISTRICT

2



- ❑ 12 Projects with Federal Navigation Channels
- ❑ 2 Projects with Navigation Structures only





U.S. ARMY




PROJECT	District	Adv / Open Bids	2023												2024												VOLUME	Placement Site	NOTES
			SEP	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG			
Morro Bay Harbor	SPL / NWP	N/A									YAQUINA																175k CY	Nearshore	
Santa Barbara Harbor (Suction Cutterhead)	SPL	N/A																									250k CY	Beach	Multi-Year Contract
Ventura Harbor (Suction Cutterhead)	SPL	N/A																									400k CY	Beach	Multi-Year Contract
Channel Islands Harbor (Suction Cutterhead)	SPL	JUL / AUG 24																									2.5M CY	Beach	Multi-Year Contract / SEP 24 - FEB 25
Marina del Rey (Clamshell)	SPL	SEP / OCT 23																									450 - 600k CY	Nearshore	Final qty dependant on funding
Surfside / Sunset (Suction Cutterhead)	SPL	AUG / SEP 23																									1.1M CY	Beach	Snowy plover on beach / seeking agency extension / contract award in negotiations
Newport Harbor (Clamshell)	SPL	TBD																									1M CY	Nearshore, Offshore, CAD	Project on hold due to litigation
San Clemente Shoreline (Hopper)	SPL / NWP	N/A																									200k CY	Beach	West Coast Hopper Contract / Start Date mid DEC
Oceanside Harbor (Suction Cutterhead)	SPL	N/A																									400k CY	Beach	Multi-Year Contract
San Diego County (Hopper)	SPL / NWP	N/A																									1.4M CY	Beach	West Coast Hopper Contract / Start Date TBD



U.S. ARMY

FY24 CONTRACT GANTT SCHEDULE

4

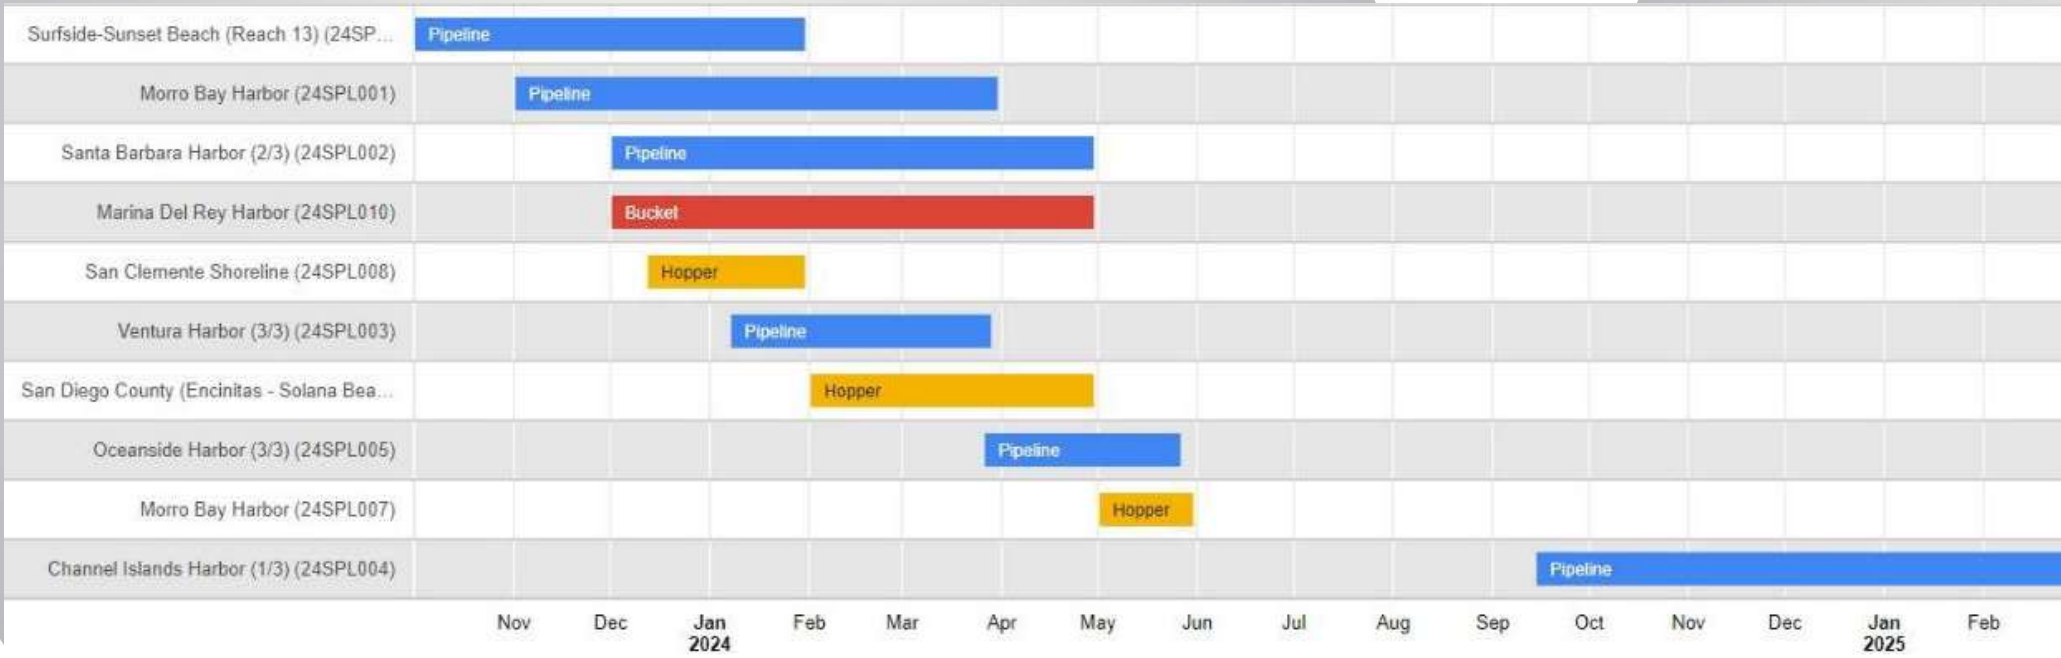



U.S. ARMY

SANTA BARBARA HARBOR

5



LOCATION:	Year 3 of 3	Santa Barbara, CA
DREDGE TYPE:		Cutterhead (bi-annually)
PLACEMENT:		Beach(BU)
QUANTITY:		140 kcy (BU)
DEPTH:		-15 ft to -35 ft
BUSINESS TYPE:		Unrestricted
ADVERTISE:		N/A
BID OPENING:		N/A
COMMENCE DREDGING:		DEC FY 25
DREDGE COMPLETE:		
WORK RESTRICTIONS/ WINDOW:		MAY 1 – SEP 15

NOTES: Harbor entrance dredged bi-annually (DEC and APR). Year 3 of 3 year contract



U.S. ARMY

VENTURA HARBOR

6



LOCATION:	Ventura, CA
DREDGE TYPE:	Cutterhead
PLACEMENT:	Beach(BU)
QUANTITY:	400 kcy (BU)
DEPTH:	-12 ft to -40 ft
BUSINESS TYPE:	Unrestricted
ADVERTISE:	NOV 2024
BID OPENING:	DEC 2024
COMMENCE DREDGING:	FEB 2025
DREDGE COMPLETE:	APR 2025
WORK RESTRICTIONS/ WINDOW:	APR 1 – SEP 15
NOTES:	New Year 3 contract



U.S. ARMY

CHANNEL ISLANDS HARBOR



7



LOCATION:	Channel Islands, CA
DREDGE TYPE:	Cutterhead
PLACEMENT:	Hueneme Beach (BU)
QUANTITY:	2.5 MCY every 2 yrs
DEPTH:	Varies (sand trap)
BUSINESS TYPE:	TBD
ADVERTISE:	JUL 2024
BID OPENING:	AUG 2024
COMMENCE DREDGING:	SEP 2024
DREDGE COMPLETE:	FEB 2025
WORK RESTRICTIONS/ WINDOW:	MAR 1 – SEP 15
NOTES: Base Award + 2 yr options FY 25, 27, 29	



U.S. ARMY

POINTS OF CONTACT

LOS ANGELES DISTRICT

Charles (Steve) Dwyer
Chief, Navigation and Coastal Branch
Charles.S.Dwyer@usace.army.mil

Jim Fields
Chief, Navigation Section
James.A.Fields@usace.army.mil

Susie Ming, PE
Chief, Coastal Section
Susan.M.Ming@usace.army.mil

